

SC075N120H7

Silicon Carbide MOSFET 1200V, 75mΩ, 33A



重庆平伟半导体股份有限公司

Features

- Uses PingWei advanced PerfectMOS technology
- Extremely low on-resistance $R_{DS(on)}$
- Excellent $Q_g \times R_{DS(on)}$ product(FOM)
- Excellent Low Ciss
- Qualified according to JEDEC criteria



100% DVDS Tested
100% Avalanche Tested



Applications

- PFC stages, hard switching PWM stages and resonant switching
- PWM stages for e.g. PC Silverbox, Adapter, LCD & PDP TV,
- Lighting, Server, Telecom and UPS

Product Summary

V_{DS}	1200V
$R_{DS(on)}$ typ.	75mΩ
I_D	33A

TO-263-7H



Package Marking and Ordering Information

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
SC075N120H7	SC075N120H7	TO-263-7H	Tape	13	24	800pcs

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	1200	V
Continuous drain current	I_D	33	A
$T_C = 25^\circ\text{C}$		23	
$T_C = 100^\circ\text{C}$			
Pulsed drain current ($T_C = 25^\circ\text{C}$)	$I_{D \text{ pulse}}$	80	A
Avalanche energy, single pulse ($L=5\text{mH}$)	E_{AS}	391	mJ
Gate-Source voltage,max.transient voltage	V_{GSmax}	-8/+22	V
Recommended operating values	V_{GSsop}	-4/+18	V
$T_C = 25^\circ\text{C}$	P_{tot}	153	W
Operating junction and storage temperature	T_j, T_{stg}	-55...+175	$^\circ\text{C}$
Soldering temperature, wave soldering only allowed at leads (1.6mm from case for 10s)	T_{sold}	260	$^\circ\text{C}$

Thermal Resistance

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Thermal resistance, junction – case.	RthJC	-	-	1.0	°C/W	-
Thermal resistance, junction - ambient(min. footprint)	RthJA	-	-	40.0	°C/W	-

Electrical Characteristic (at T_j = 25 °C, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

Static Characteristic

Drain-source breakdown voltage	BV _{DSS}	1200	-	-	V	V _{GS} =0V, I _D =250μA
Gate threshold voltage	V _{GS(th)}	1.9	3.5	4.0	V	V _{DS} =V _{GS} , I _D =10mA
Zero gate voltage drain current	I _{DSS}	-	-	10	μA	V _{DS} =1200V, V _{GS} =0V
		-	-	100		T _j =25°C T _j =175°C
Gate-source leakage current	I _{GSS}	-	-	200	nA	V _{GS} =22V, V _{DS} =0V
		-	-	-100	nA	V _{GS} =-8V, V _{DS} =0V
Drain-source on-state resistance	R _{DS(on)}	-	75	95	mΩ	V _{GS} =18V, I _D =33A
Transconductance	g _{fs}	-	11	-	S	V _{DS} =20V, I _D =33A

Dynamic Characteristic

Input Capacitance	C _{iss}	-	1200	-	pF	V _{GS} =0V, V _{DS} =50V, f=1MHz
Output Capacitance	C _{oss}	-	63	-		
Reverse Transfer Capacitance	C _{rss}	-	9.8	-		
Gate Total Charge	Q _G	-	68	-	nC	V _{DS} =750V, I _D =21A , V _{GS} =-5/18V
Gate-Source charge	Q _{gs}	-	21	-		
Gate-Drain charge	Q _{gd}	-	15	-		
Turn-on delay time	t _{d(on)}	-	13	-	ns	V _{GS} =-5/18V, V _{DD} =400V, R _{G_ext} =5Ω, I _D =20A Timing relative to V _{DS}
Rise time	t _r	-	12	-		
Turn-off delay time	t _{d(off)}	-	16	-		
Fall time	t _f	-	10	-		
Gate resistance	R _G	-	5.5	-	Ω	V _{GS} =0V, V _{DS} =0V, f=1MHz

Body Diode Characteristic

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V_{SD}	- -	4.2 3.2	6.0	V	$V_{GS}=0V, I_{SD}=33A$ $T_j=25^{\circ}C$ $T_j=175^{\circ}C$
Body Diode Continuous Forward Current	I_S	-	-	33	A	TC = 25°C
		-	-	26	A	TC = 175°C
Body Diode Reverse Recovery Time	t_{rr}	-	28	-	ns	$V_{GS}=-5V, I_{SD}=15A,$
Body Diode Reverse Recovery Charge	Q_{rr}	-	62	-	nC	$V_R=400V$ $dI/dt=1200A/\mu s$

Typical Performance Characteristics

Figure.1 Output Characteristics $T_J=25^\circ\text{C}$

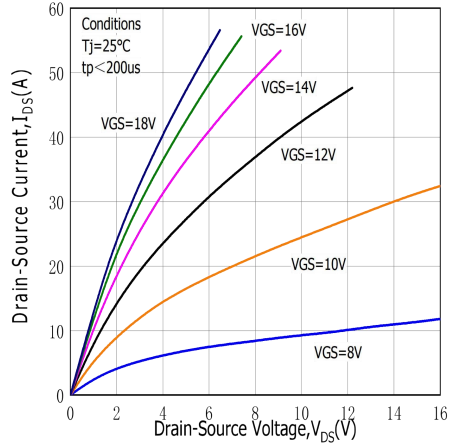


Figure.2 Output Characteristics $T_J=175^\circ\text{C}$

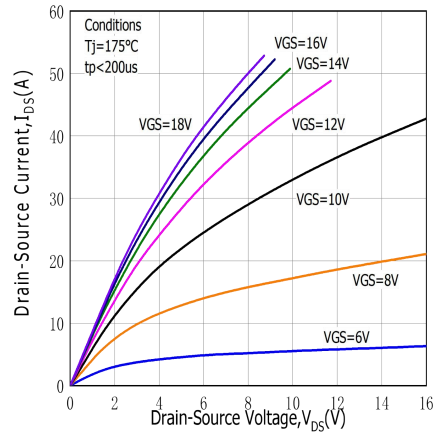


Figure.3 On-Resistance vs. Temperature

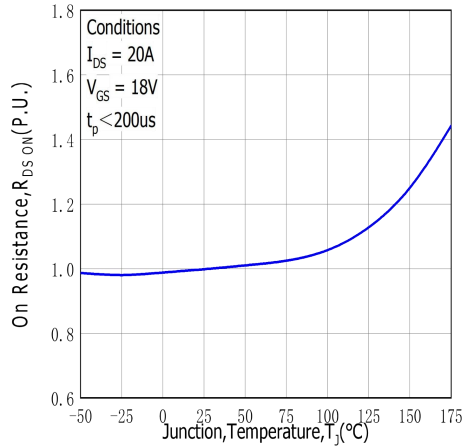


Figure.4 On-Resistance vs. Drain Current for Various Temperatures

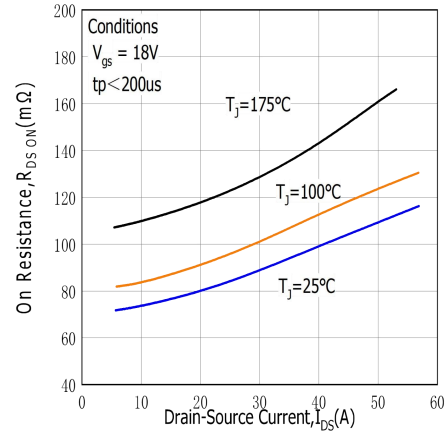


Figure.5 On-Resistance vs. Temperature for Various Gate Voltage

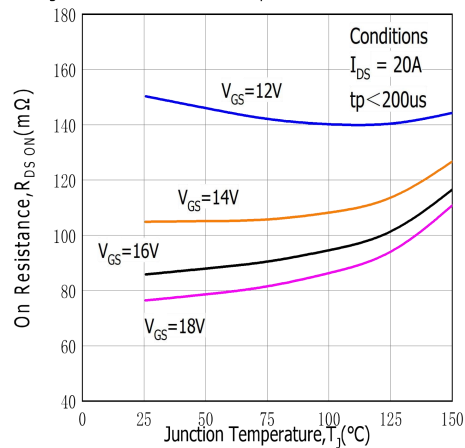


Figure.6 Transfer Characteristic for Various Junction Temperatures

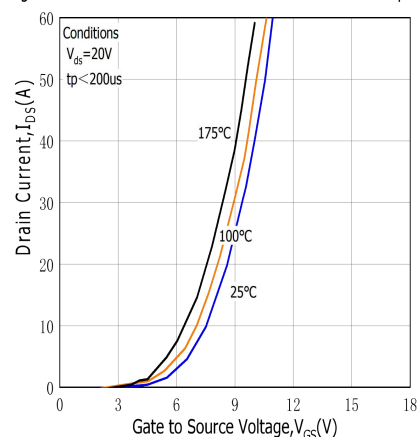


Figure.7 Body Diode Characteristic at 25°C

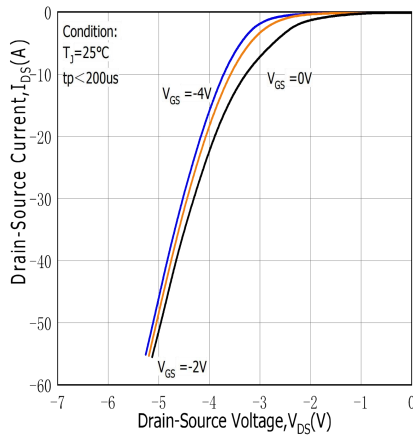


Figure.8 Body Diode Characteristic at 175°C

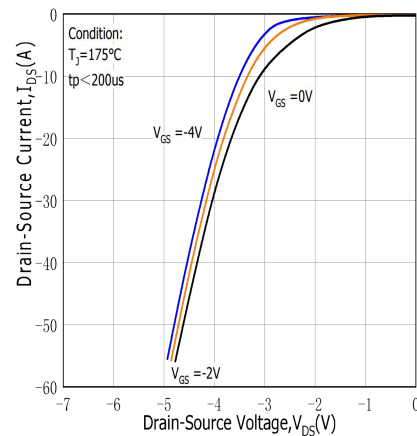


Figure.9 Threshold Voltage vs. Temperature

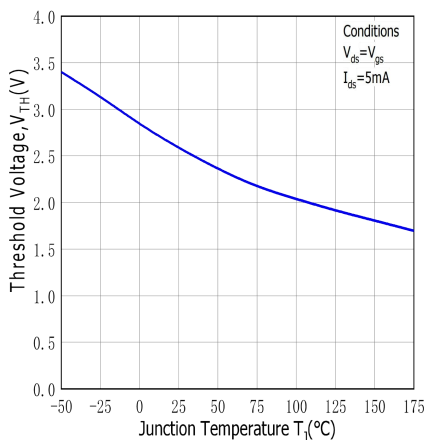


Figure.10 Gate Charge Characteristics

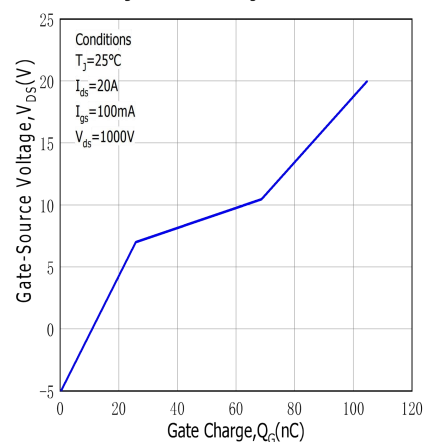


Figure.11 3rd Quadrant Characteristic at 25°C

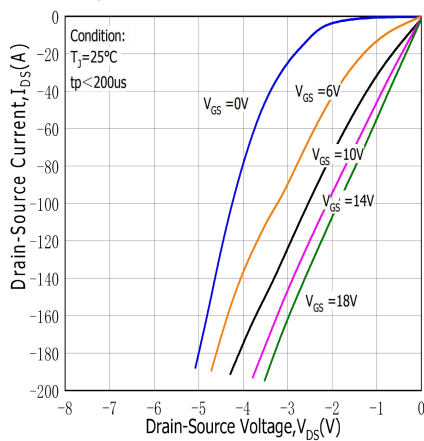
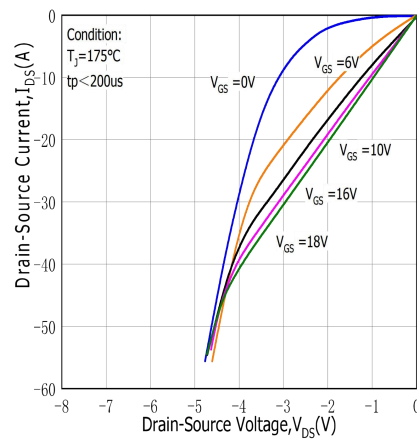


Figure.12 3rd Quadrant Characteristic at 175°C



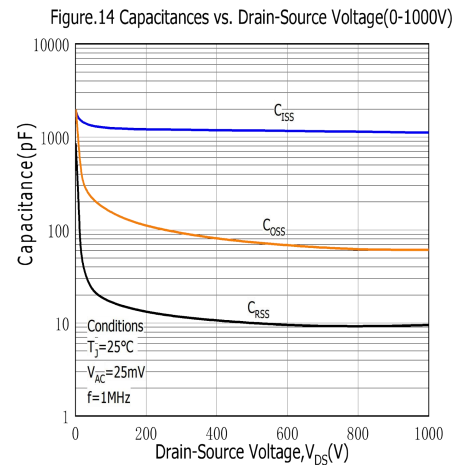
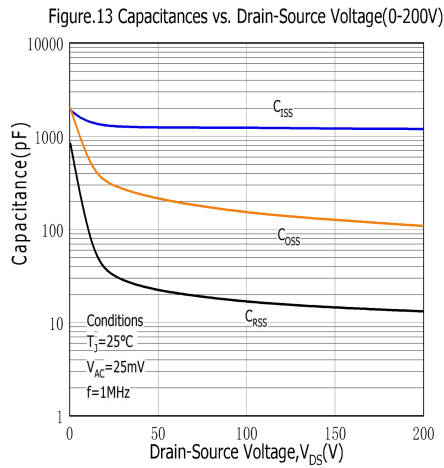


Fig 13: Safe Operating Area




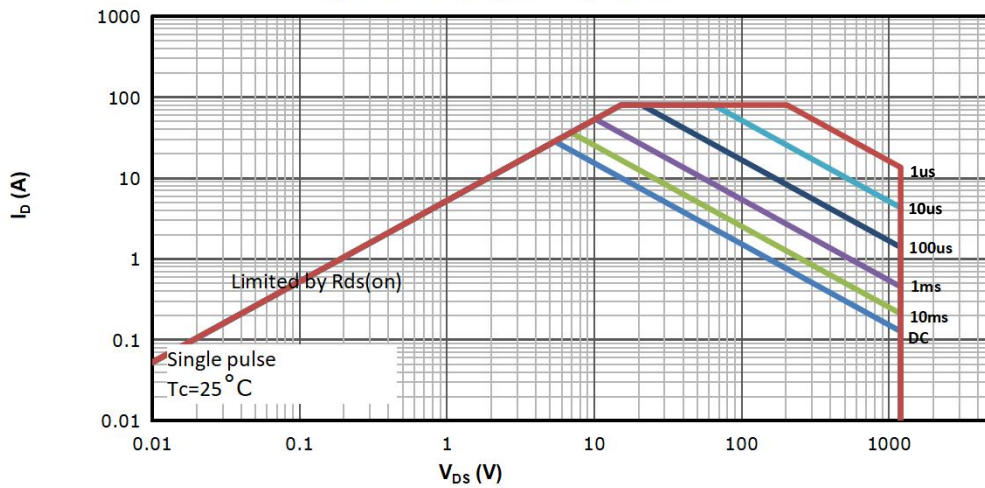


Fig 14: Max. Transient Thermal Impedance

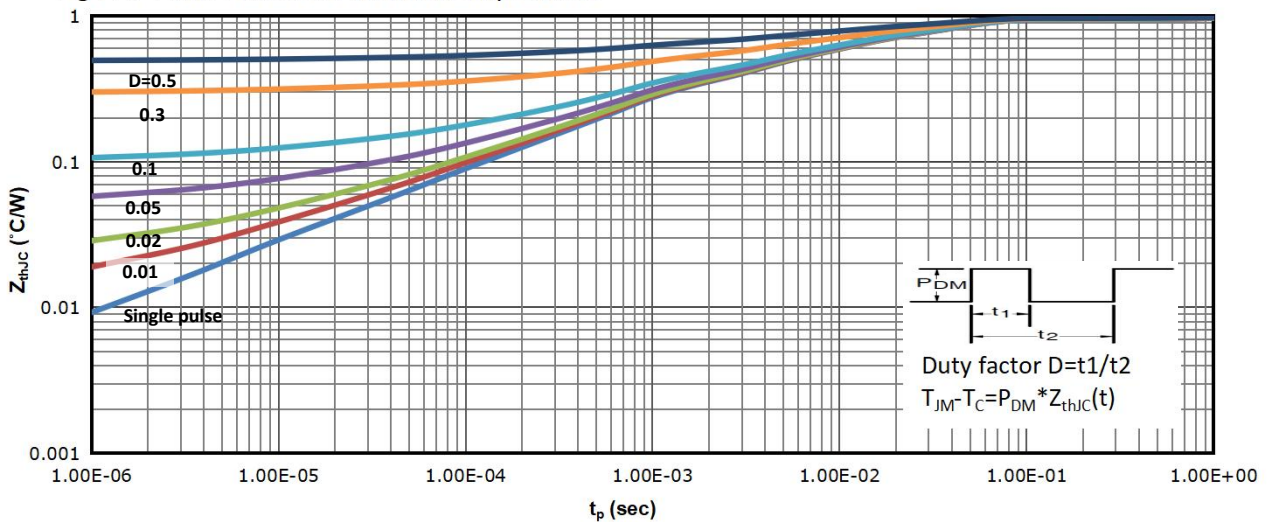
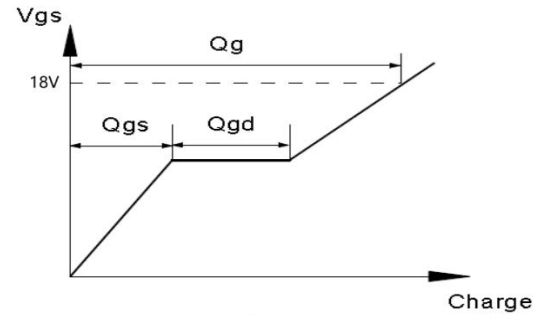


Test Circuit & Waveform



Gate Charge Test Circuit & Waveform

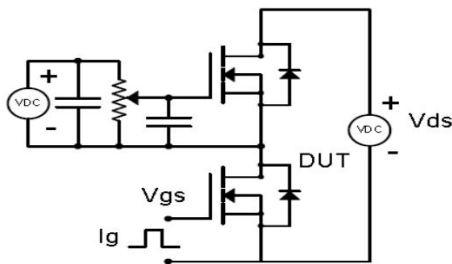



Resistive Switching Test Circuit & Waveforms

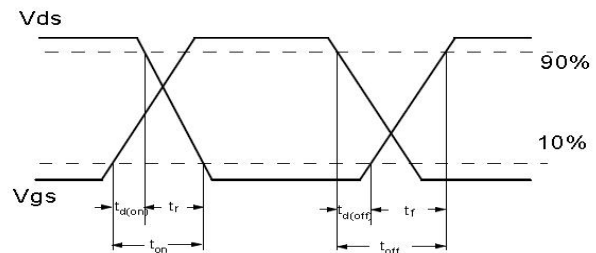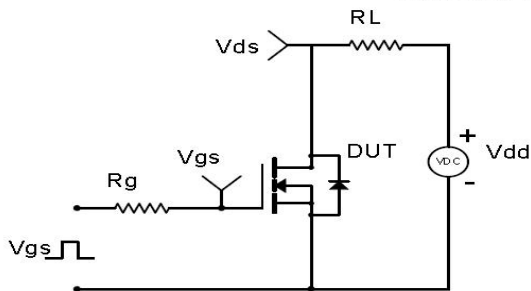

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

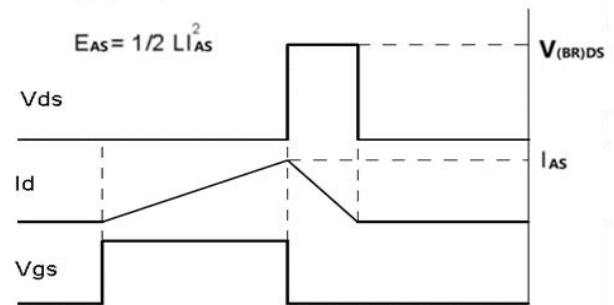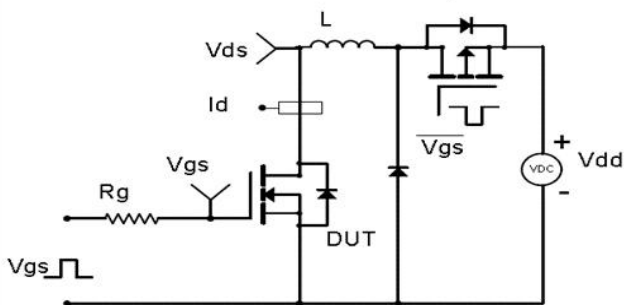

Diode Recovery Test Circuit & Waveforms

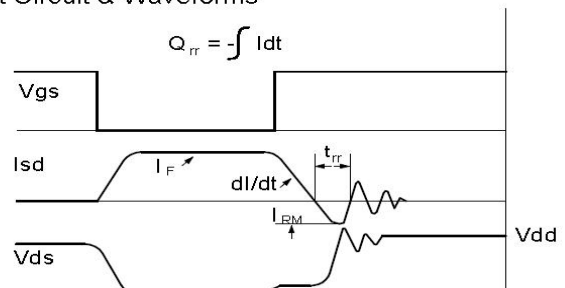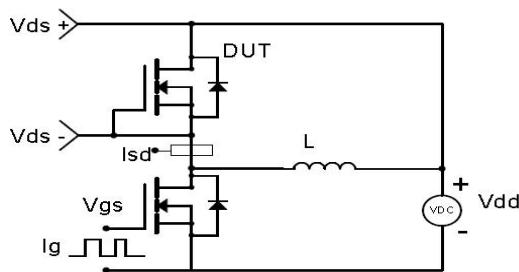


SC075N120H7

Silicon Carbide MOSFET 1200V, 75mΩ, 33A



重庆平伟半导体股份有限公司

Package Outline: TO-263-7H

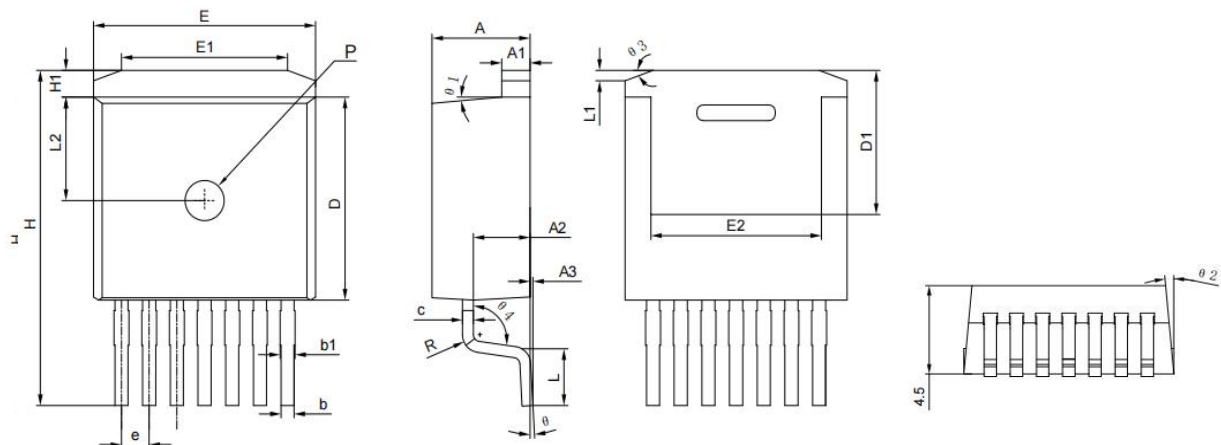

SYMBOL	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.40	4.60	0.173	0.181
A1	1.25	1.40	0.049	0.055
A2	2.45	2.70	0.096	0.106
A3	0.05	0.20	0.002	0.008
b	0.50	0.70	0.020	0.028
b1	0.60	0.85	0.024	0.033
c	0.45	0.60	0.018	0.024
D	8.88	9.28	0.350	0.365
D1	5.80	6.40	0.228	0.252
E	9.18	10.28	0.361	0.405
E1	6.67	7.47	0.263	0.294
E2	6.90	7.60	0.272	0.299
e	1.27		0.050	
H	14.80	15.20	0.583	0.598
H1	1.10	1.30	0.043	0.051
L	2.35	2.75	0.093	0.108
L1	0.37	0.77	0.015	0.030
L2	4.48	4.78	0.176	0.188
θ	0°	5°	0°	5°
θ1	3°	7°	3°	7°
θ2	3°	7°	3°	7°
θ3	15°	25°	15°	25°
θ4	93°	100°	93°	100°
R	0.75	0.85	0.030	0.033
p	1.70	1.90	0.067	0.075

Disclaimer

Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.

Unless otherwise specified in the datasheet, the product is designed and qualified as a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace and life-support devices or systems.

Buyer is responsible for its products and applications using PingWei products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by PingWei.

"Typical" parameters which may be provided in PingWei data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE